


Automotive QS[™]

Quick Sag Advanced Bending and Tempering System

Glasstech's Advanced Bending and Tempering System for Quick Sag automotive glass produces high optical quality glass to precise tolerances in simpler shapes. Tooling is simple and uses only one forming ring. This results in lower costs and minimal downtime for part changeovers. Glass produced on this system has exceptional optical quality and uniformity of shape. Coated and tinted glass can be processed without difficulty. This system is highly flexible and can be configured in both single-side (as shown) and double-side exit models. Also, it can be combined with a cylindrical bender to produce a glass processing system capable of making both single-curvature and double-curvature parts.

General Specifications for Quick Sag

- Maximum depth of bend: 100mm (4")
- Minimum radius of curvature for 3.2mm (1/8") glass: 1000mm (40")

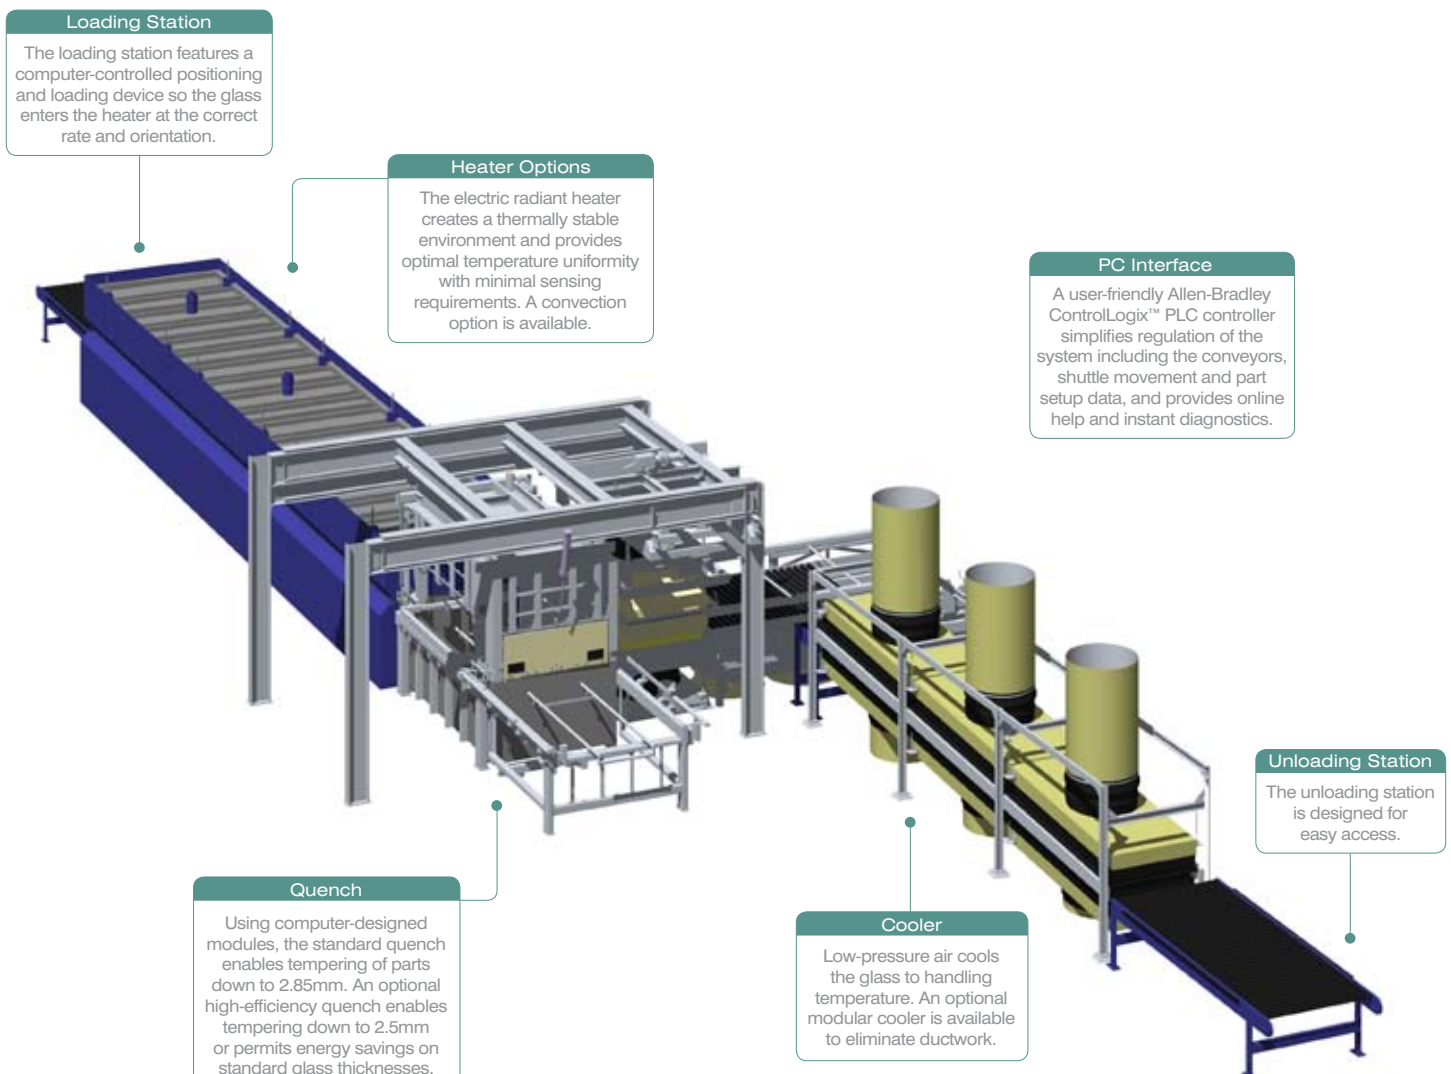

Automotive QS™ Technical Features

Glass thickness: Min. 3.0mm (±0.1mm); Max. 6.0mm (+0.0mm, -0.2mm)
 Loading area: 1220mm x 1828mm (48" x 72") all thicknesses
 Glass size and production rate based on typical size loads.

Production Capability

Glass Thickness (mm)	Low Volume 4848* – 10"	Single-Sided 4872** – 10"	Double-Sided 48120*** – 10"	Maximum Area in Any Single Piece	
	Loads/Hour	Loads/Hour	Loads/Hour	(sq m)	(sq ft)
3.0 – 3.2	120	240	400	1.3	13.9
3.8 – 4.2	96	210	350	1.5	16.1
4.8 – 5.2	72	170	280	1.5	16.1
5.8 – 6.0	60	140	230	1.5	16.1

Minimum glass size: 380mm (15") in the direction of travel

Maximum depth and radius of bend (gravity sag):

- 100mm (4") Max. depth
- 1000mm (40") Min. radius of curvature
- 2540mm (100") Max. radius of curvature

Shape (gravity sag):

- Cylindrical

*4848 – 11m (36) heater plus 3.66m (12) bender
 **4872 – 18.3m (60) heater plus 3.66m (12) bender
 ***48120 – 33m (108) heater plus 3.66m (12) bender

Floor Space Requirements

Heater System	Total Length		Total Width		Total Height		Blower Room	
	(m)	(ft)	(m)	(ft)	(m)	(ft)	(m)	(ft)
Low Volume – QS 4848	30	100	12	39.4	7	23	20 x 11	65.6 x 36
Single-Sided – QS 4872	38	124.7	12	39.4	7	23	20 x 11	65.6 x 36
Double-Sided – QS 48120	53	174	17	55.8	7	23	20 x 11	65.6 x 36

Installed Electric Power

Heater System	Heating	Quenching† (kW)		Electrical		Drives	Total
	(kW)	Fan Power	Aftercooler	3-Phase (v)	4-Wire (Hz)	(kW)	(kW)
Quick Sag 4848*	1600	1200	75.0	380 – 600	50 – 60	22	2900
Quick Sag 4872**	2020	1200	112.5	380 – 600	50 – 60	22	3350
Quick Sag 48120***	3600	1312	225.0	380 – 600	50 – 60	22	5047

†Quench power based on ECE capability for 2.8mm thickness. Blow-up is powered by lower quench fan on single-sided.

*11m (36) heater plus 3.66m (12) bender
 **18.3m (60) heater plus 3.66m (12) bender
 ***33m (108) heater plus 3.66m (12) bender

Glasstech, Inc.
 Perrysburg, Ohio USA
 Tel: +1-419-661-9500
 Fax: +1-419-661-9616

Glasstech, Inc.
 New York, New York USA
 Tel: +1-212-489-8040
 Fax: +1-212-307-5781

Glasstech, Inc.
 Shanghai, China
 Tel: +86-21-5836-7560
 Fax: +86-21-5836-8968

glasstech®
 WHERE INNOVATION CONTINUES

www.glasstech.com



Glasstech, Inc.
 Mumbai, India
 Tel/Fax: +91-22-6710-1629

Glasstech Limited
 Worcester, England
 Tel: +44-1905-723663
 Fax: +44-1905-20400