

EPB-T™
EPB-XT™

AUTOMOTIVE EPB-T™ | EPB-XT™

External Press Bending System


Glasstech's EPB-T system is an innovative, highly versatile glass bending system designed for the production of automotive doorlites, backlites and sunroofs. The system satisfies the automotive OEM demand for complex part shapes with superior optical quality, while also meeting the glass processor's need for greater productivity, economical tooling and energy conservation.

Designed as an expandable system, the production capabilities of the EPB-T can easily meet production needs. The system is available in three configurations, EPB-SS [single stream, 915mm (36") wide], EPB-DS [dual stream, 1828mm (72") wide] and EPB-XT [expanded capability, 2134mm (84") wide].

Production capabilities vary, with standard capacity, intermediate capacity and high capacity configurations available.

Production Capabilities

- Bent and tempered sidelites, sunroofs and backlites for automotive applications
- Bent and semi-tempered sidelites, sunroofs and backlites suitable for lamination
- Cylindrical, compound and complex-shaped tempered or semi-tempered parts
- Glasstech's EPB-T system meets the shape tolerance and optical quality requirements of Audi/Volkswagen, BMW, Honda, Toyota, Nissan, Mercedes and others

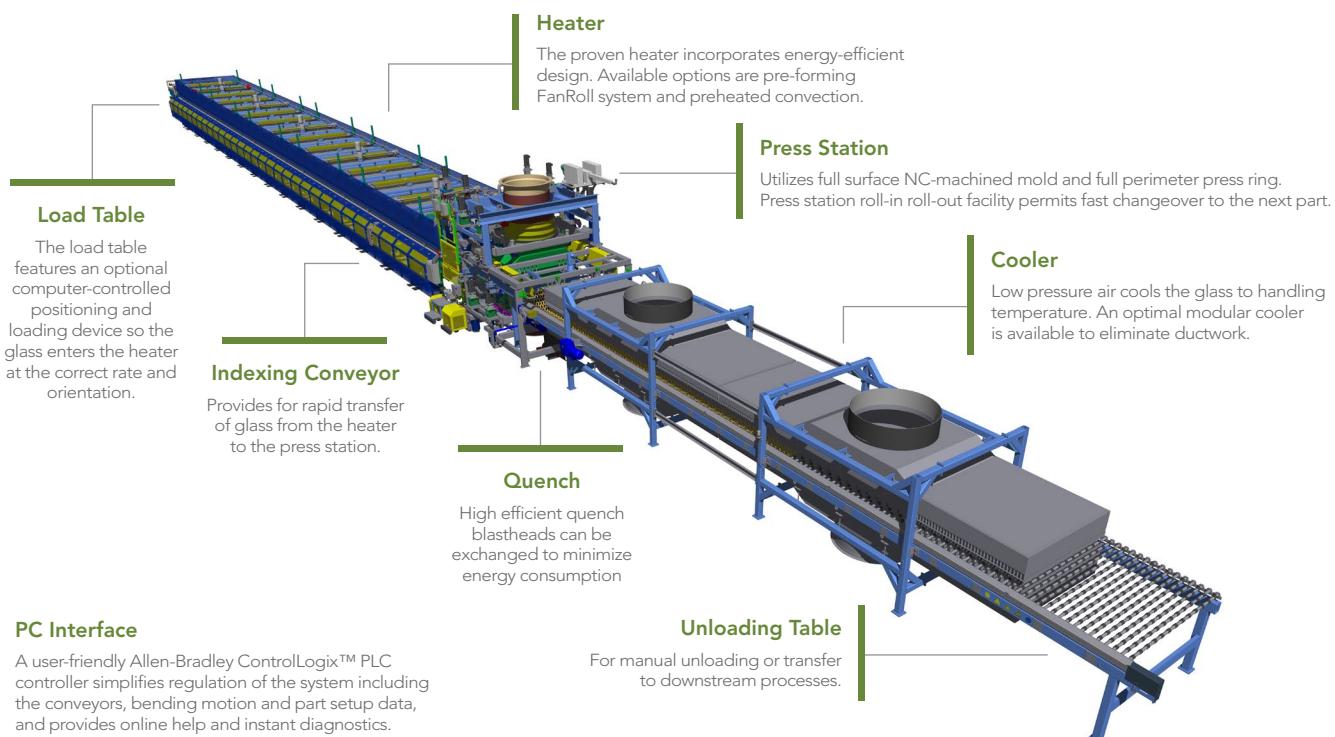

EPB-T™
EPB-XT™

AUTOMOTIVE EPB-T™ | EPB-XT™ TECHNICAL FEATURES

Product Size and Forming Capability EPB-SS, EPB-T and EPB-XT

	Glass Thickness	Size						Depth of Bend	Minimum Radius of Curvature		
		Minimum Glass Size Length x Width			Maximum Glass Size Length x Width						
		(mm)	(mm)	(in)	(mm)	(in)	(mm)				
EPB-SS Standard System	1.6 – 4.85	254 x 228	10 x 9		1220 x 864	48 x 34	100	3.9	1143	45	
EPB-T Sidelite Mode	1.6 – 4.85	381 x 406	15 x 16		1220 x 864	48 x 34	100	3.9	1143	45	
EPB-T	1.6 – 4.85	890 x 500	35 x 20		1220 x 1828	48 x 72	112	4.4	600*	23.6*	
EPB-XT	1.6 – 4.85	890 x 500	35 x 20		1600 x 2134	63 x 84	112	4.4	600*	23.6*	

*Requires optional fan roller

Example System Configurations

	Heater Length	Glass Thickness					
		1.6 - 3.0mm**		3.2mm	3.5mm	3.8mm	4.8mm
		(m)	(ft)	(sec)*	(sec)*	(sec)*	(sec)*
EPB-SS Standard Capacity	21	70	10	10	10.5	12	14
EPB-SS High Capacity	33.5	110	7.3	7.3	7.5	8.6	10
EPB-T Standard Capacity	21	68.9	12.5	12.5	13.8	15.2	19.3
EPB-T Intermediate Capacity	26.4	86.7	12	12	13	14.5	17
EPB-T High Capacity Sidelite	33.6	110.7	7.5	7.5	8.6	10	
EPB-T High Capacity	33.6	110.7	12	12	13	14.5	17
EPB-XT Standard	21.2	69.5	12.6	12.6	14	15.5	19.6
EPB-XT Intermediate Capacity	26.7	87.5	12.5	12.5	13.5	15	17.5
EPB-XT High Capacity	34	111.5	12.5	12.5	13.5	15	17.5

*1m (39.3") tall part size, taller parts have extended cycle time

**Heat strengthened stress level

Installed Electric Power kW

	Heating (kW)	Quench Fans*** (kW)	Cooling Fans (kW)	Drives (kW)	Total (kW)										
					EPB-SS Standard Capacity	EPB-SS High Capacity	EPB-T Standard Capacity	EPB-T Intermediate Capacity	EPB-T High Capacity Sidelite	EPB-T High Capacity	EPB-XT Standard	EPB-XT Intermediate Capacity	EPB-XT High Capacity		
EPB-SS Standard Capacity	1390	600		112	60		2162		2400		187		3654		
EPB-SS High Capacity	2200	1275		224	60		3759		2690		224		4249		
EPB-T Standard Capacity	3350	1500		298	60		5208		3350		298		4983		
EPB-T Intermediate Capacity	2660	1712		261	65		4698		3230		261		5268		
EPB-T High Capacity Sidelite	4000	1712		336	65		6113		4000		336		6113		

***Quench power based on ECE capability for 3.2mm thickness

Floor Space Requirements

	Heater Length (m)	Heater Length (ft)	Total Length (m)		Total Width 1 Press (m)		Total Width 2 Presses (m)		Height*	
			(m)	(ft)	(m)	(ft)	(m)	(ft)	(m)	(ft)
EPB-SS Standard Capacity	21.3	70	38.6	126.8	9.9	32.4	13.7	44.9	6.4	21
EPB-SS High Capacity	33.5	110	61.5	207.3	9.9	32.4	13.7	44.9	6.4	21
EPB-T Standard Capacity	21	68.9	43.1	141.5	14.2	46.6	18	59	6.4	21
EPB-T Intermediate Capacity	26.4	86.7	51.7	169.5	14.2	46.6	18	59	6.4	21
EPB-T High Capacity Sidelite	33.6	110.7	60.7	199	14.2	46.6	18	59	6.4	21
EPB-T High Capacity	33.6	110.7	59	193.5	14.2	46.6	18	59	6.4	21
EPB-XT Standard	21.5	69.5	46.2	151.5	16.8	55	22.2	73	6.7	22
EPB-XT Intermediate Capacity	26.7	87.5	54.7	179.5	16.8	55	22.2	73	6.7	22
EPB-XT High Capacity	34	111.5	62	203.5	16.8	55	22.2	73	6.7	22

*Plus quench ductwork

Glasstech, Inc.
Perrysburg, Ohio USA
Tel: +1-419-661-9500
Fax: +1-419-661-9616

Glasstech, Inc.
New York, New York USA
Tel: +1-212-489-8040
Fax: +1-212-307-5781

glasstech®
WHERE INNOVATION CONTINUES
www.glasstech.com

Glasstech, Inc.
Shanghai, China
Tel: +86-21-5836-7560
Fax: +86-21-5836-8968

Glasstech, Inc.
Mumbai, India
Tel/Fax: +91-98339-22876