

Solar FCH-S™

Forced Convection Heater Flat Glass Tempering System


FCH-S offers the perfect combination of controlled, natural gas fired, forced convection heating along with superior tempering technology and reduced heating costs for producing flat solar panel glass. The system is ideal for heat treating active (coated) glass, high light transmission (low-iron) smooth or textured cover panels, rigid back panels and clear glass for PV panels.

One of the world's leading systems for efficient processing of all types of flat glass products, FCH provides reliable, repeatable results with high productivity for low cost and highly accurate perimeter and surface shape for efficient product performance.

The Glasstech FCH-S System:

- Processes glass parts from 3.0mm – 6.0mm (.118" – 1/4") thickness
- Can heat high performance coated glass in 33-35 seconds per millimeter of thickness
- Is available in 1220mm (48") and 1520mm (60") widths
- Can process coated and low-iron glass without difficulty

FCH-S has the capability to heat clear glass at a rate of 30 seconds per millimeter of thickness, and high performance TCO/Low-E glass in 33-35 seconds per millimeter, depending on the specific composition of the coating. This heating rate for high performance TCO/Low-E glass is about one-half that of typical radiant systems.

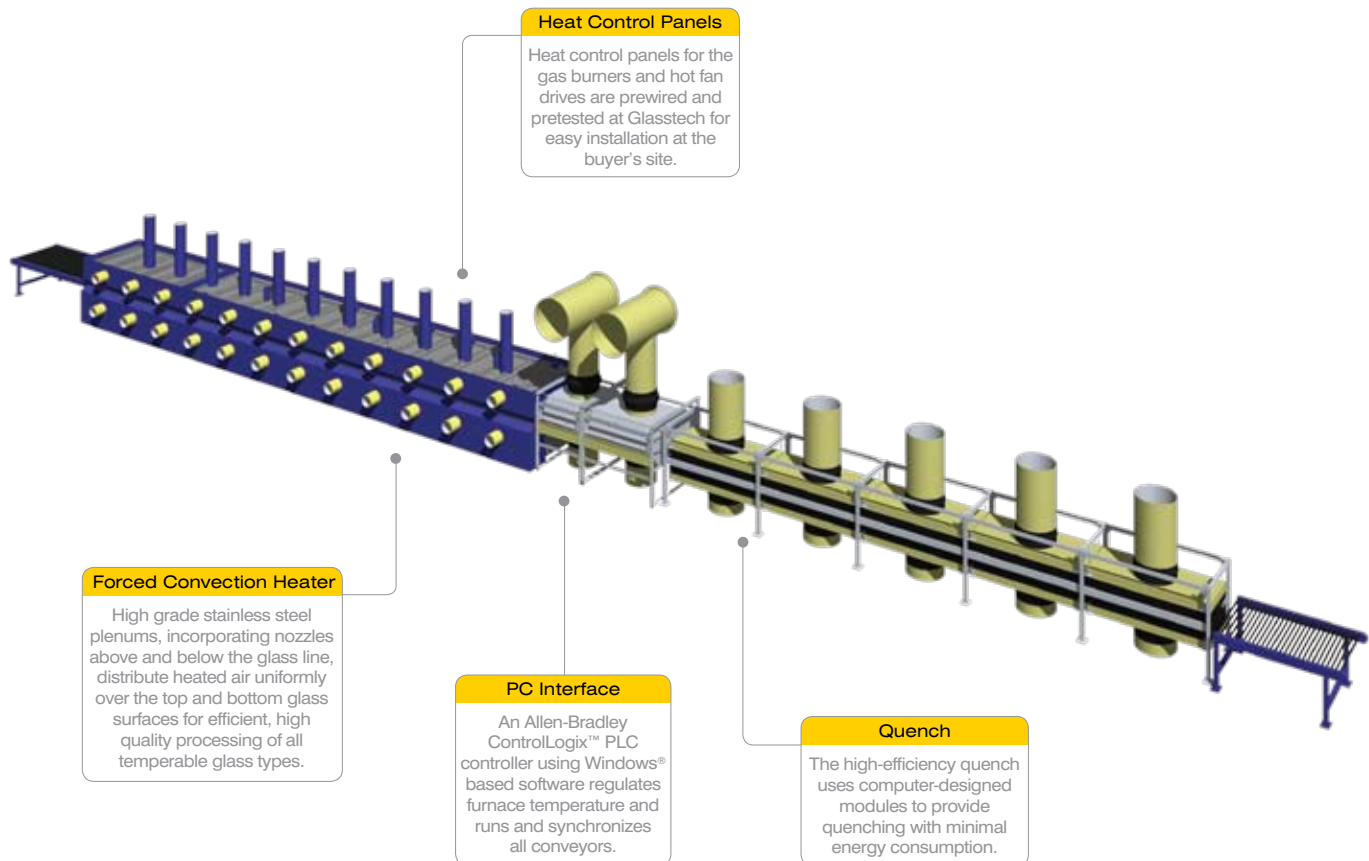

Solar FCH-S™ Technical Features

Production Capability*

Glass Thickness		Standard 90' Length						Extended 120' Length					
		Production at Line Speed						Production at Line Speed					
		Meters/Minute			Feet/Minute			Meters/Minute			Feet/Minute		
(mm)	(in)	Most Glass Types	Low-Iron	TCO Coated**	Most Glass Types	Low-Iron	TCO Coated**	Most Glass Types	Low-Iron	TCO Coated**	Most Glass Types	Low-Iron	TCO Coated**
3.0	.118	18.3	15.7	15.7	60.0	51.4	51.4	24.4	20.9	20.9	80.0	68.6	68.6
4.0	5/32	13.7	11.8	11.8	45.0	38.6	38.6	18.3	15.7	15.7	60.0	51.4	51.4
5.0	3/16	11.0	9.4	9.4	36.0	30.9	30.9	14.6	12.5	12.5	48.0	41.1	41.1
6.0	1/4	9.1	7.8	7.8	30.0	25.7	25.7	12.2	10.5	10.5	40.0	34.3	34.3

* Production rates for coated panels or different glass compositions will vary depending on part size, thickness and specific type of coating used, and the consistency of the coating.

** TCO coating refers to Low-E type pyrolytic tin oxide coatings.

Systems available in 1220mm (48") and 1520mm (60") widths
Minimum Glass Size: 380mm (15") in direction of travel

Standard System Configurations

Load Width		Heater Length		Max. Load Length	
				Standard System	
(mm)	(in)	(m)	(ft)	(mm)	(in)
1220	48	27.4	90	2440	96
		36.6	120	2440	96
1520	60	27.4	90	2440	96
		36.6	120	2440	96

Installed Power

Heater Width		Electric Heating	Gas Heating	Quench†	Cooler	Drives	Total	Total
(mm)	(in)	(kW)	(mm Btu/hr)	(kW)	(kW)	(kW)	(kW)	(mm Btu/hr)
1220	48	360	30	270	300	22.5	952.5	30
		480	40	270	337.5	22.5	1110	40
1520	60	360	30	340	300	22.5	1022.5	30
		480	40	340	337.5	22.5	1180	40

† Quench power based on 4mm (5/32") minimum thickness to ANSI Z97 1-1984 and BS 6206 or compatible international standards.

Other system widths available based on customer specifications.

Glasstech, Inc.
Perrysburg, Ohio USA
Tel: +1-419-661-9500
Fax: +1-419-661-9616

Glasstech, Inc.
New York, New York USA
Tel: +1-212-489-8040
Fax: +1-212-307-5781

Glasstech, Inc.
Shanghai, China
Tel: +86-21-5836-7560
Fax: +86-21-5836-8968

glasstech®
WHERE INNOVATION CONTINUES

www.glasstech.com



Glasstech, Inc.
Mumbai, India
Tel/Fax: +91-22-6710-1629

Glasstech Limited
Worcester, England
Tel: +44-1905-723663
Fax: +44-1905-20400

Glasstech is committed to continuously improve and provide its products and services so that they meet or exceed its own and its customers' quality, cost and schedule requirements.
©2008 Glasstech, Inc., 09/25/08